

LED BULB

Address:GAOHONG INDUSTRIAL PARK,LINAN,
HANGZHOU,ZHEJIANG PROVINCE,CHINA,311300
TEL: +86-571-58600581 +86-571-23617128
Web:www.wasuns.com
E-mail:wasuns@wasuns.com

WASUNS

WASUNS

WASUNS

WE FOCUS ON LIGHTING
WE CARE YOUR LIFE



COMPANY INTRODUCE

HUASHANG ELECTRIC, member of Wasuns group, establised in 2007, which located in LINAN CITY, ZHEJIANG PROVINCE, CHINA. We specialize in manufacturing energy saving lamps and LED lamps.

Our factory covers an area of 50000 square meters. We have 650 workers now, including 20 high level R&D engineers and most of them have bachelor degree and rich experience. Currently we have the capacity of more than 50,000 pieces of CFL and LED lamps every day .

Our own brand "WASUNS" is famous in Europe, North America and Asia. We always put the quality into the first place and pay great attention to management, staff training and technology. We are willing to work with you and make long time cooperation.

We focus on lighting, we care your life.



Item	Power	Input Voltage(V)	Lumen Flux(Lm)	CRI	Beam Angle	Lifetime (hrs)	Base
827003	3W	AC100-240	270	80	200°	30000	E27/E14
827005	5W	AC100-240	450	80	200°	30000	E27/E14
827007	7W	AC100-240	630	80	200°	30000	E27/E14



Item	Power	Input Voltage(V)	Lumen Flux(Lm)	CRI	Beam Angle	Lifetime (hrs)	Base
800003	3W	AC100-240	270	80	220°	30000	E27/B22
800005	5W	AC100-240	450	80	220°	30000	E27/B22
800007	7W	AC100-240	630	80	220°	30000	E27/B22
800009	9W	AC100-240	810	80	220°	30000	E27/B22
800012	12W	AC100-240	1150	80	220°	30000	E27/B22
800015	15W	AC100-240	1400	80	220°	30000	E27/B22
800018	18W	AC100-240	1600	80	220°	30000	E27/B22



Item	Power	Input Voltage(V)	CRI	Beam Angle	Lifetime (hrs)	Base
826007	7W	AC100-240	80	200°	30000	E27/E14
826009	9W	AC100-240	80	200°	30000	E27/E14





Item	Power	Input Voltage(V)	Lumen Flux(Lm)	CRI	Beam Angle	Lifetime (hrs)	Shape	Base
801003	3W	AC100-240	270	80	220°	30000	Candle	E27/E14
801005	5W	AC100-240	450	80	220°	30000	Candle	E27/E14
801007	7W	AC100-240	630	80	220°	30000	Candle	E27/E14
831003	3W	AC100-240	270	80	220°	30000	Candle	E27/E14
831005	5W	AC100-240	450	80	220°	30000	Candle	E27/E14
831007	7W	AC100-240	630	80	220°	30000	Candle	E27/E14
802003	3W	AC100-240	270	80	220°	30000	Tailed candle	E27/E14
802005	5W	AC100-240	450	80	220°	30000	Tailed candle	E27/E14
802007	7W	AC100-240	630	80	220°	30000	Tailed candle	E27/E14



QUALITY FIRST
SERVICE FIRST




Item	Power	Input Voltage(V)	Lumen Flux(Lm)	CRI	Beam Angle	Lifetime (hrs)	Base
830020	20W	AC100-240	1800	80	220°	30000	E27/B22
830030	30W	AC100-240	2700	80	220°	30000	E27/B22
830040	40W	AC100-240	3600	80	220°	30000	E27/B22
830050	50W	AC100-240	4000	80	220°	30000	E27/B22
830060	60W	AC100-240	5100	80	220°	30000	E27/B22
830080	80W	AC100-240	7000	80	220°	30000	E27/B22
830100	100W	AC100-240	8800	80	220°	30000	E27/B22



Item	Power	Input Voltage(V)	Lumen Flux(Lm)	CRI	Beam Angle	Lifetime (hrs)	Base
800020	20W	AC100-240	1800	80	220°	30000	E27/B22
800030	30W	AC100-240	2700	80	220°	30000	E27/B22
800040	40W	AC100-240	3600	80	220°	30000	E27/B22
800050	50W	AC100-240	4000	80	220°	30000	E27/B22
800060	60W	AC100-240	4800	80	220°	30000	E27/B22
800070	70W	AC100-240	5600	80	220°	30000	E27/B22



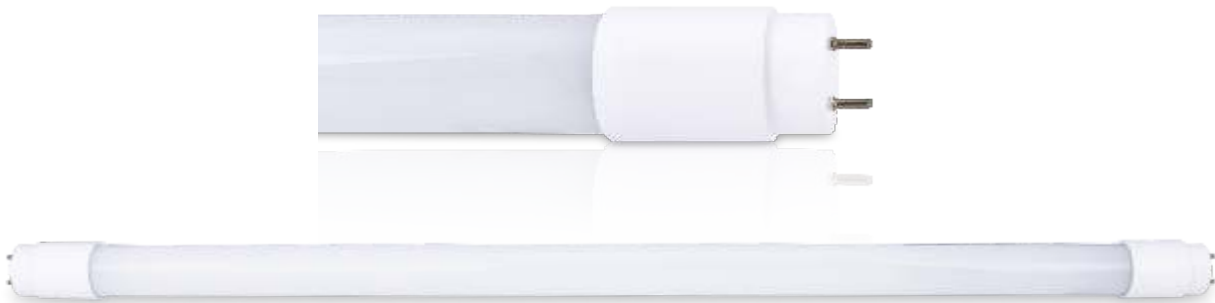

Item	Power	Input Voltage(V)	Lumen Flux(Lm)	CRI	Beam Angle	Lifetime (hrs)	Tube	Base
812010	10	AC100-240	900	80	120°	30000	T8	G13
812015	15	AC100-240	1400	80	120°	30000	T8	G13
812018	18	AC100-240	1600	80	120°	30000	T8	G13
812024	24	AC100-240	2100	80	120°	30000	T8	G13



Item	Power	Input Voltage(V)	Lumen Flux(Lm)	CRI	Beam Angle	Lifetime (hrs)	Length	Tube
811004	4w	AC100-240	360	80	120°	30000	300mm	T5
811007	7w	AC100-240	630	80	120°	30000	600mm	T5
811010	10w	AC100-240	900	80	120°	30000	900mm	T5
811014	14w	AC100-240	1200	80	120°	30000	1200mm	T5



Item	Power	Input Voltage(V)	Lumen Flux(Lm)	CRI	Beam Angle	Lifetime (hrs)	Base
808002	2W	AC100-240	200	80	320°	30000	E27/E14
808004	4W	AC100-240	400	80	320°	30000	E27/E14
808006	6W	AC100-240	600	80	320°	30000	E27/E14
808008	8W	AC100-240	800	80	320°	30000	E27/E14



Item	Power	Input Voltage(V)	Lumen Flux(Lm)	CRI	Beam Angle	Lifetime (hrs)	Shape	Base
809002	2W	AC100-240	200	80	320°	30000	Candle	E27/E14
809004	4W	AC100-240	400	80	320°	30000	Candle	E27/E14
810002	2W	AC100-240	200	80	320°	30000	Tailed candle	E27/E14
810004	4W	AC100-240	400	80	320°	30000	Tailed candle	E27/E14
825002	2W	AC100-240	200	80	320°	30000	G45	E27/E14
825004	4W	AC100-240	400	80	320°	30000	G45	E27/E14






Item	Power	Input Voltage(V)	Lumen Flux(Lm)	CRI	Beam Angle	Lifetime (hrs)	Shape	Size
806003	3W	AC100-240	210	80	120°	30000	Round	90*39
806006	6W	AC100-240	420	80	120°	30000	Round	120*39
806009	9W	AC100-240	630	80	120°	30000	Round	145*39
806012	12W	AC100-240	840	80	120°	30000	Round	170*39
806018	18W	AC100-240	1260	80	120°	30000	Round	225*39
806024	24W	AC100-240	1680	80	120°	30000	Round	295*39
805003	3W	AC100-240	210	80	120°	30000	Square	90*39
805006	6W	AC100-240	420	80	120°	30000	Square	120*39
805009	9W	AC100-240	630	80	120°	30000	Square	145*39
805012	12W	AC100-240	840	80	120°	30000	Square	170*39
805018	18W	AC100-240	1260	80	120°	30000	Square	225*39
805024	24W	AC100-240	1680	80	120°	30000	Square	295*39



Item	Power	Input Voltage(V)	Lumen Flux(Lm)	CRI	Beam Angle	Lifetime (hrs)	Shape	Hole size	Size
804003	3W	AC100-240	210	80	120°	30000	Round	∅ 70mm	90*11
804006	6W	AC100-240	420	80	120°	30000	Round	∅ 105mm	120*11
804009	9W	AC100-240	630	80	120°	30000	Round	∅ 130mm	145*11
804012	12W	AC100-240	840	80	120°	30000	Round	∅ 155mm	170*11
804015	15W	AC100-240	1050	80	120°	30000	Round	∅ 180mm	200*11
804018	18W	AC100-240	1260	80	120°	30000	Round	∅ 200mm	225*11
804024	24W	AC100-240	1680	80	120°	30000	Round	∅ 280mm	300*11
803003	3W	AC100-240	210	80	120°	30000	Square	∅ 70mm	90*11
803006	6W	AC100-240	420	80	120°	30000	Square	∅ 105mm	120*11
803009	9W	AC100-240	630	80	120°	30000	Square	∅ 130mm	145*11
803012	12W	AC100-240	840	80	120°	30000	Square	∅ 155mm	170*11
803015	15W	AC100-240	1050	80	120°	30000	Square	∅ 180mm	200*11
803018	18W	AC100-240	1260	80	120°	30000	Square	∅ 200mm	225*11
803024	24W	AC100-240	1680	80	120°	30000	Square	∅ 280mm	300*11



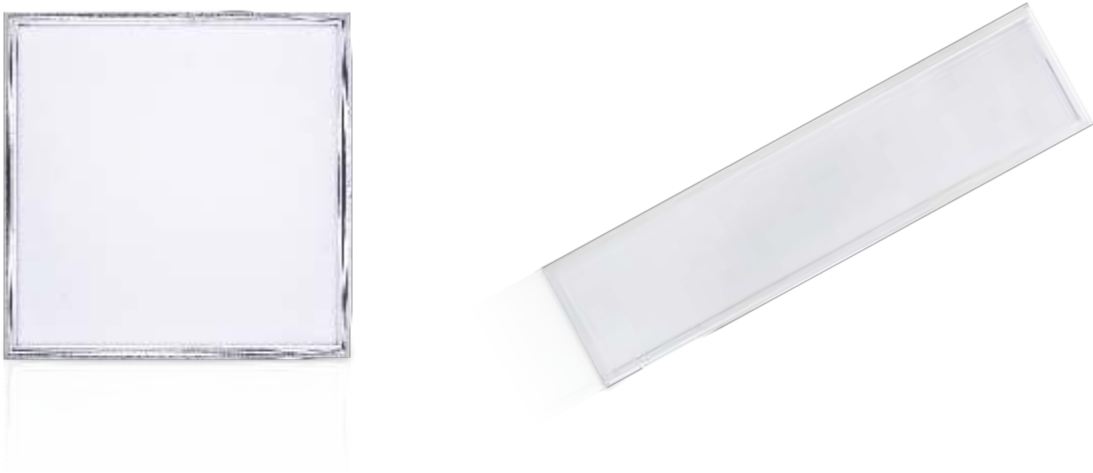

Item	Power	Input Voltage(V)	Lumen Flux(Lm)	CRI	Beam Angle	Lifetime (hrs)	Size
807008	8W	AC100-240	700	80	120°	30000	300*300
807012	12W	AC100-240	1100	80	120°	30000	300*300
807016	16W	AC100-240	1400	80	120°	30000	300*300
807024	24W	AC100-240	2000	80	120°	30000	300*600
807036	36W	AC100-240	2900	80	120°	30000	600*600
807038	38W	AC100-240	3000	80	120°	30000	300*1200
807048	48W	AC100-240	4000	80	120°	30000	300*1200
807072	72W	AC100-240	6000	80	120°	30000	600*1200



WE FOCUS ON LIGHTING
WE CARE YOUR LIFE




Item	Power	Input Voltage(V)	Lumen Flux(Lm)	CRI	Beam Angle	Lifetime (hrs)	Size
814010	10W	AC100-240	900	80	120°	30000	148*114*40
814020	20W	AC100-240	1800	80	120°	30000	207*154*48
814030	30W	AC100-240	2500	80	120°	30000	255*194*50
814050	50W	AC100-240	4200	80	120°	30000	300*230*60
814100	100W	AC100-240	9000	80	120°	30000	300*230*90
814200	200W	AC100-240	18000	80	120°	30000	425*330*140
814300	300W	AC100-240	27000	80	120°	30000	435*390*110
814400	400W	AC100-240	36000	80	120°	30000	460*455*120



Item	Power	Input Voltage(V)	Lumen Flux(Lm)	CRI	Beam Angle	Lifetime (hrs)	Size
813010	10W	AC100-240	900	80	120°	30000	148*114*40
813020	20W	AC100-240	1800	80	120°	30000	207*154*48
813030	30W	AC100-240	2500	80	120°	30000	255*194*50
813050	50W	AC100-240	4200	80	120°	30000	300*230*60
813100	100W	AC100-240	9000	80	120°	30000	300*230*90



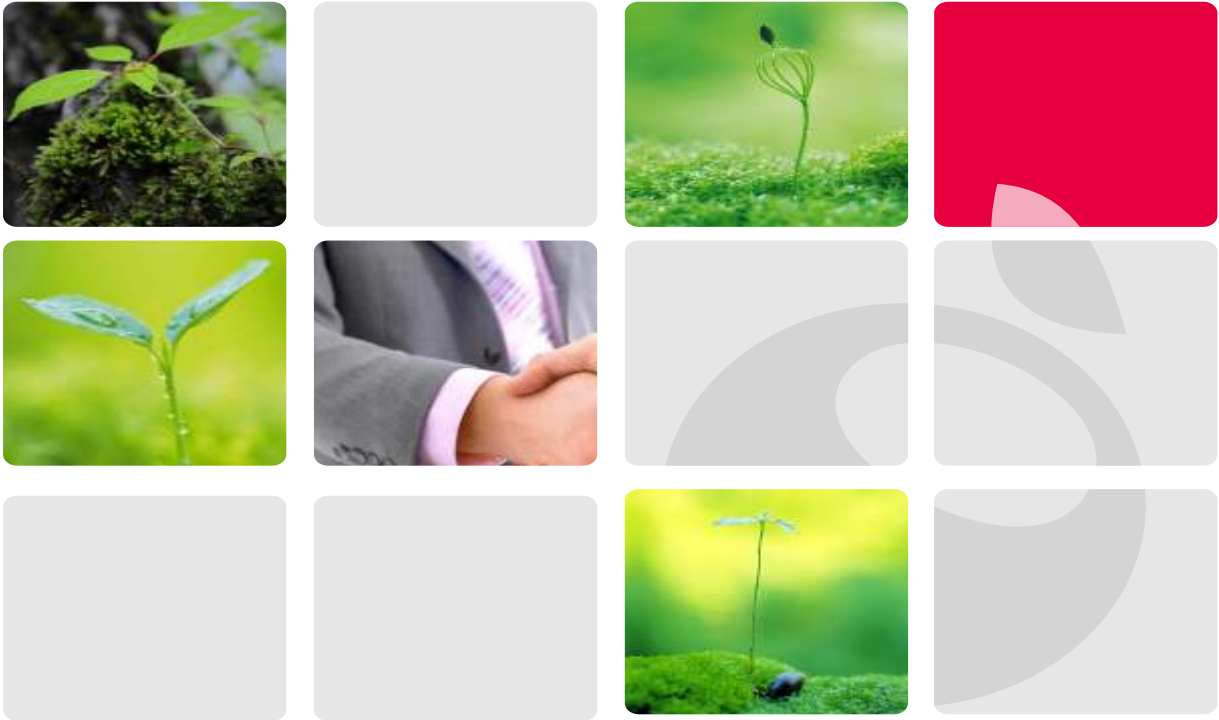

Item	Power	Input Voltage(V)	Lumen Flux(Lm)	CRI	Beam Angle	Lifetime (hrs)	Base
816003	3W	AC100-240	280	80	100°	30000	MR16
816004	4W	AC100-240	360	80	100°	30000	MR16
816005	5W	AC100-240	450	80	100°	30000	MR16
816006	6W	AC100-240	540	80	100°	30000	MR16
817003	3W	AC100-240	280	80	100°	30000	GU10
817004	4W	AC100-240	360	80	100°	30000	GU10
817005	5W	AC100-240	450	80	100°	30000	GU10
817006	6W	AC100-240	540	80	100°	30000	GU10



Item	Description	Input Voltage(V)	Material	Recharging Time	Emergency Duration	LED Type	Waterproof Rating	Lumen Flux (Lm)
829001	30pcs LED	AC100-240	ABS+PC	15-18H	3-6H	SMD	IP20	/
829002	45pcs LED	AC100-240	ABS+PC	15-18H	3-6H	SMD	IP20	/
829003	SIGN LED	AC100-240	ABS+PC	15-18H	3-6H	SMD	IP20	/
829004	TWIN LED	AC100-240	ABS+PC	15-18H	3-6H	SMD	IP20	1000





Item	Power	Input Voltage(V)	Lumen Flux(Lm)	CRI	Beam Angle	Lifetime (hrs)	Base
824005	5W	AC100-240	450	80	270°	30000	E27/E14
824007	7W	AC100-240	600	80	270°	30000	E27/E14
824009	9W	AC100-240	800	80	270°	30000	E27/E14
824012	12W	AC100-240	1100	80	270°	30000	E27/E14
824024	24W	AC100-240	2300	80	270°	30000	E27/E14



Item	Power	Input Voltage(V)	Lumen Flux(Lm)	CRI	Beam Angle	Lifetime (hrs)	Base
823003	3W	AC100-240	280	80	270°	30000	E27/E14
823005	5W	AC100-240	450	80	270°	30000	E27/E14
823007	7W	AC100-240	600	80	270°	30000	E27/E14
823009	9W	AC100-240	800	80	270°	30000	E27/E14
823012	12W	AC100-240	1100	80	270°	30000	E27
823016	16W	AC100-240	1500	80	270°	30000	E27
823020	20W	AC100-240	1900	80	270°	30000	E27
823023	23W	AC100-240	2200	80	270°	30000	E27
823030	30W	AC100-240	2900	80	270°	30000	E27
823036	36W	AC100-240	3400	80	270°	30000	E27





Item	Power	Input Voltage(V)	Lumen Flux(Lm)	CRI	Beam Angle	Lifetime (hrs)	Base
820007	7W	AC100-240	480	80	45°	30000	E27/E26
820011	11W	AC100-240	875	80	45°	30000	E27/E26
820015	15W	AC100-240	1000	80	45°	30000	E27/E26



Item	Power	Input Voltage(V)	Lumen Flux(Lm)	CRI	Beam Angle	Lifetime (hrs)	Size(MM)
828009	9W	AC100-240	720	80	120°	30000	600*75*20
828018	18W	AC100-240	1440	80	120°	30000	600*75*20
828036	36W	AC100-240	2880	80	120°	30000	1200*75*20



Item	Power	Input Voltage(V)	Lumen Flux(Lm)	CRI	Beam Angle	Lifetime (hrs)	Base
822003	3W	AC100-240	240	80	100°	30000	E14/E27
822005	5W	AC100-240	450	80	100°	30000	E14/E27
822008	8W	AC100-240	600	80	100°	30000	E27/E26
822010	10W	AC100-240	800	80	100°	30000	E27/E26

